

# Exhibit "A"

## Waterlefe Bank Restoration

### Bid Form 2018 Bank Repairs


Bid Item	Description	Quantity	Unit	Unit Price	Total
1	Bank Stabilization utilizing FW404 Geotubes including back and staking, C-350 turf reinforcement, Mirafi FW404 fabric and 4"-6" rip-rap	3,180	LF		
2	Sodding with St. Augustine	5,000	SY		
3	Access repair and Miscellaneous	1	LS		
4*	Yard Drains	10	EA		
5**	Miscellaneous cleanup and work	1	LS		
6	Bid Bond	1	LS		
<b>Total</b>					<b>\$</b>

item 4\* *Includes the installation of one 12" catch basin at the top of the slope and extending a 4" HDPE corrugated pipe under the geofabric down the slope and discharging into the lake below the low water level. Locations to be field determined in areas of existing drainage pipes and significant erosion*

item 5\*\* *Includes the repair and replacement of sprinkler heads and damaged pipe, adjusting and adding sprinklers to provide full coverage of repair area, and setting the timers to run everyday for 30 days, then readjusting the heads back to the normal run times*

**Contractor:** \_\_\_\_\_



**Bids Due Friday March 9, 2018 by 5:00 PM**

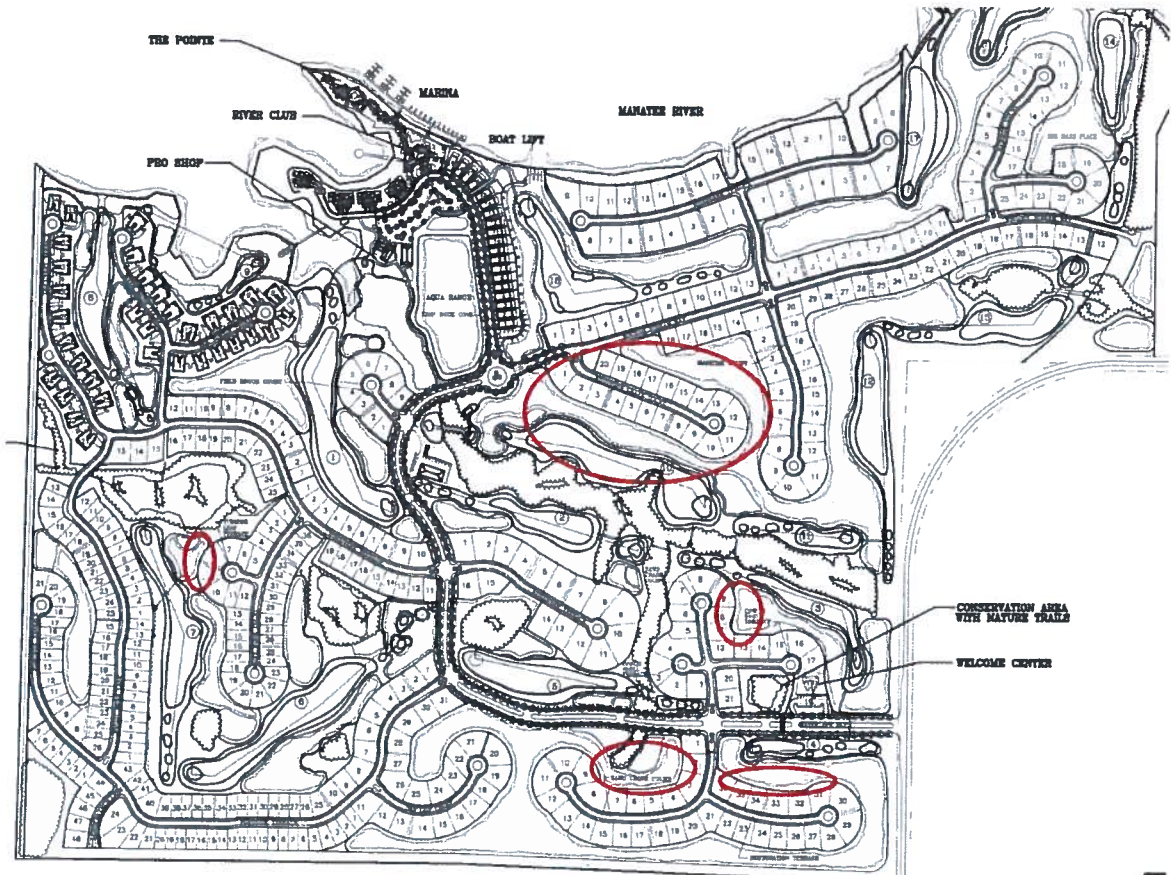

# Waterlefe Lake Bank Repairs

3604 53<sup>rd</sup> Ave. East – Bradenton, Florida 34203; Phone: (941) 251-7613



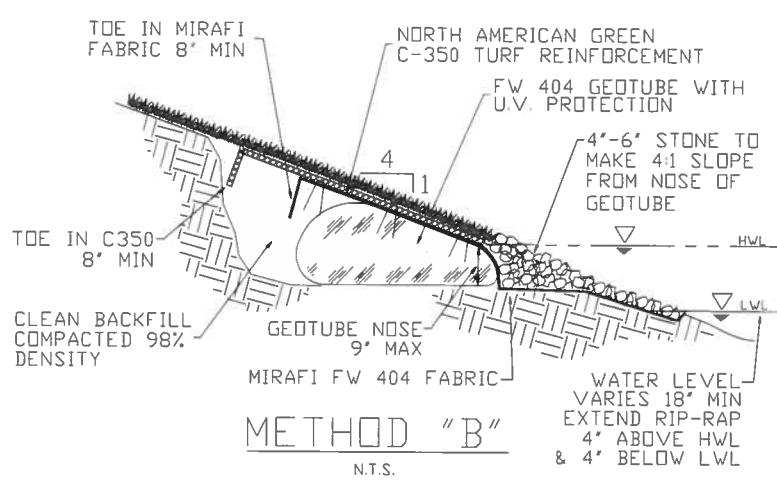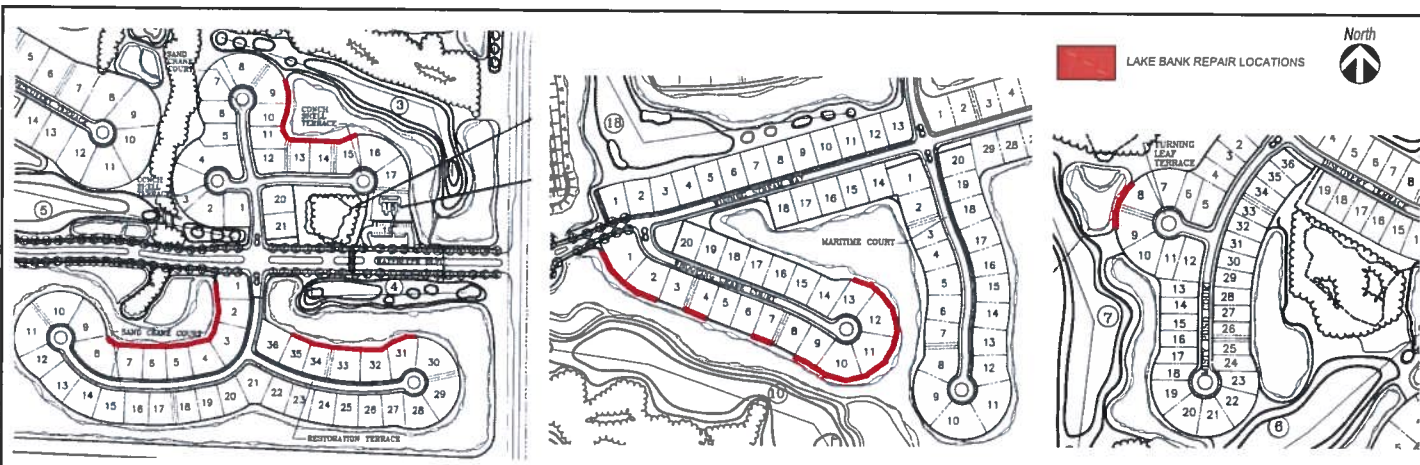

Schappacher Engineering, LLC 3805 SW 40th Ave, Gainesville, FL 32608 PHONE: (352) 381-7611 WWW.SCHAPACHER.COM	
WATERLEFE CDD LAKE BANK EROSION	SHEET NUMBER